

CONSTANTLY REFINING PRODUCTS





HAND POWER PULLER



至光工具股份有限公司

J&K International Co., Ltd. Jun Kaung Industries Co., Ltd.

台灣台中市大里區景庄街180巷20號 Factory: 20, Lane 180, Jing Juang St., Tali, Taichung Taiwan 412

Tel:886-4-24962255 Fax:886-4-24969265

e-mail: jk@jktool.com.tw www.autoaccessory.com.tw www.jktool.com.tw














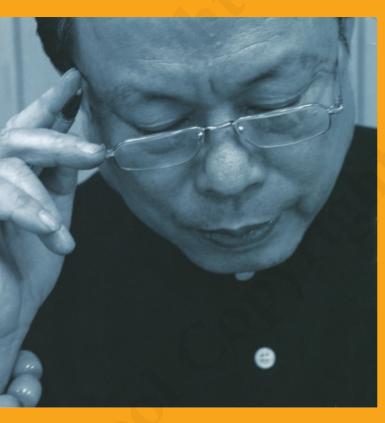

Welcome to Jun Kaung® world ...



Collection

• Hand Power Puller



Winch & Jack



Electricians Tool



About JK



Hardness Tester



Puller Fatigue Tester



Salt Spray (Fog) Testing Machine



4T Testing Machine



Tie Down Fatigue Tester



20T Micro-computer Universal Testing Machine



. annon roomig macinio



Torsion Testing Machine



Winch Testing Machine

Since 1985, when JK first Hand Power Puller was manufactured in Taiwan, quality has been an integral part of all the products that bear JK name.

JK operates one operations center in Taiwan. The headquarters located in Taichung markets and finances global business and manages brand worldwide.

Market-Oriented Strategic Planning

JK develops the board marketing objectives and strategy based on an analysis of the current marketing situation and opportunities. JK Group is a market-oriented corporation, which enables it to remain at the forefront of the markets in auto industry.

JK means a high-performance mark that consistently satisfies or exceeds the exception of consumers.

JK pioneers both the research and the development fields of manufacturing hand tools that have become the essential elements in auto industries.

Not only does JK satisfy its customers' requirements, but also it consults for the interests of its customers.

JK is an established and rapidly growing supplier of hand tool products to auto industry. Its offerings include hand power puller, tie down, trailer winch, trailer jack, tie down buckle, web sling, luggage cord, cargo net, hook, and related auto accessories.

One-Stop Shop and Total Solution

"Listening to the customers" is an essential feature of our quality service initiative.


To pursue enhanced quality efforts including improved production procedures, innovative research and development, and best service.

Our customer service team responds the questions and complaints within 24 hours.

We continually look for ways to improve quality. Our quality system as well as our products is established and developed with international standards.

We commit to research a dedicated product development and application program, designed to provide value-added services to our customers.

A partnership with customers enhances their ability to edge competition by getting to market faster and more economically.

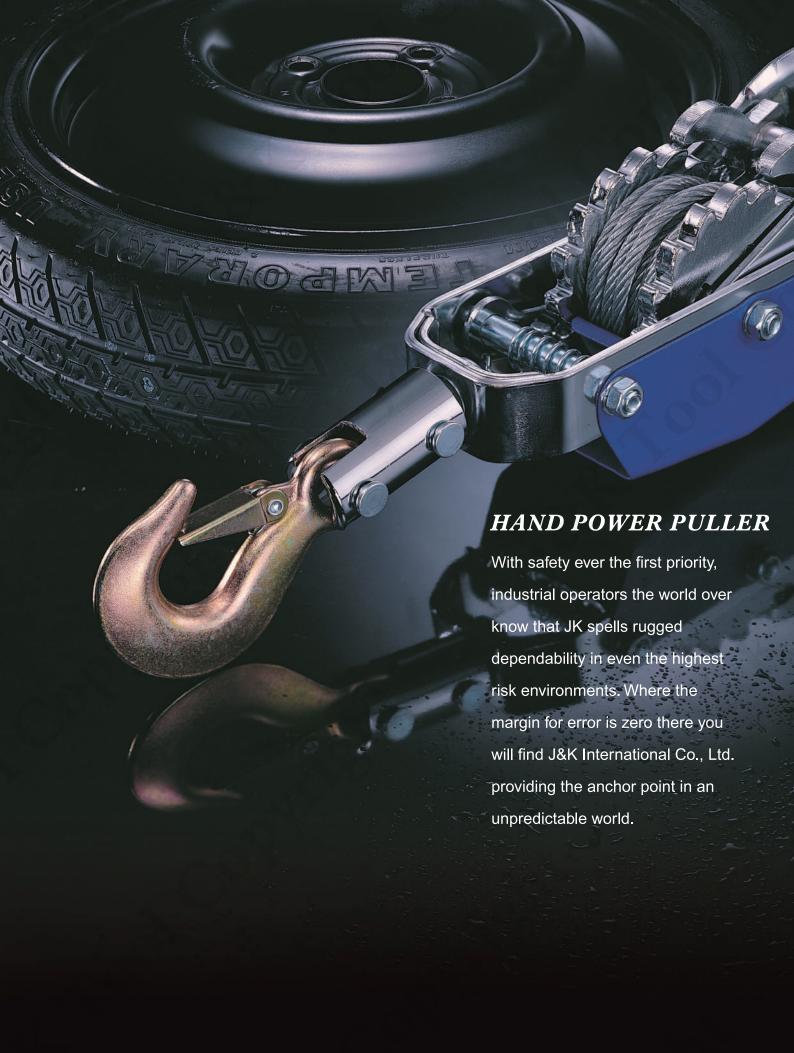

HAND POWER PULLER



J&K Hand Power Pullers are suitable for moving vehicles, boats, logs, machines and other heavy objects.

All models are fitted with ratchet safety devices. Trouble- free thumb control release for maximum safety powerful ratcheting systems while pulling heavy duty load. It is perfect for all your demanding pulling applications, fencing, landscaping and moving heavy equipment. Be it emergency, recreational, agricultural or industrial, J&K Hand Power Pullers can do it all.



Strong, durable and easy to operate



JUN KAUNG INDUSTRIES CO., LTD. TEST REPORT

ADD:20, Lane 180, Jing Juang ST., Tali, Taichung, Taiwan

TEL :04-24962255 FAX :04-24969265

試件類別: HP-406 LOT No.: **940322003**

試件來源: H-51 DATE: **03/23/2005** TEST SPEED 20

No	Specimen	Max Force (kgf)	Break Force (kgf)	Tensile Strength (kgf/mm^2)	Elongation (mm)	Elongation Rate (%)
1	HP-406	6136	6136	6136	4.67	9.34
2	HP-406	6120	6120	6120	5.27	10.54
3	HP-406	6096	6096	6096	4.8	9.6
4	HP-406	6100	6100	6100	4.67	9.34
5	HP-406	6126	6126	6126	5.3	10.6



MANEGER :


呂詩廳

TESTER :

3/ 4×1/4 3/23


R

HOW TO OPERATE HAND POWER PULLER




(1) TO RAISE LOAD OR APPLY TENSION

Push down yellow pawl spring (1) to engage Drive Pawl and Ratchet Wheel. Each stroke of handle will wind cable to pull load.




(2) TO RELEASE PULLER

Pull up yellow Pawl Spring (1) Steadily push handle until Drive Pawl pushes and disengages Stop Pawl in the direction of arrow at (2) to clear Ratchet Tooth. This releases load one notch. Repeat this handle motion as required to release tension at a time.



(3) TO EXTEND CABLE

Pull up Stop Pawl in the direction of arrow at (2) and at the same time pull Cable until desired slack is obtained.




(4) SINGLE LINE OPERATION INSTRUCTION

Take off E-ring from Cable Rack (3) and from Pin (4) & (5) to un-assemble them all. Insert Cable Lead Stopper into Cable Rack (3) and fix Hook & Cable Rack (3) by Pin with E-ring

CAUTION: While puller is in single line status, the permitted capacity is half of that shown on the handle.

Our quality, your security guard

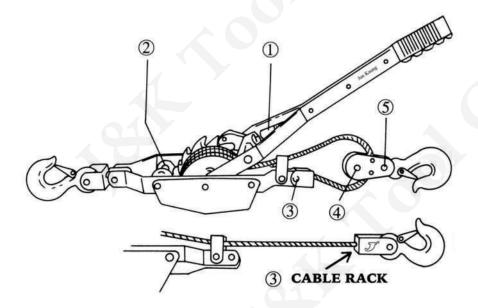

CAUTION: Make sure your Hand Power Puller is maintained in safe and proper working condition by observing the following rules:

- 1. Inspect cable regularly to examine the frays, kinks, broken strands or distortion. The cable should be replaced once one of above situation has occurred.
- 2. Do not pull cable over or around a corner.
- 3. Do not weap cable around any object and hook it back on itself.
- 4. Do not overloard; know how much load is allowed when you are pulling.
- 5. Do not use a "cheater" pipe or other device to lengthen the handle for additional leverage. This will destroy the puller itself.
- 6. **Do not** operate puller with less than 3 wraps of cable on the spindle.
- 7. Please do use an adequate sling, eyebolt or other accessory attached to the load to be pulled. And make sure that there is positive engagement of the puller hook to the load.

CABLE REPLACEMENT

A "Keyhole" opening of special quick-change design in the barrel of the ratchet wheel and a swayed end to the cable permit instant, secure replacement of the cable, Pull all the cable off the ratchet wheel, snap old cable out of "keyhole", snap in new cable, and then rewind cable on ratchet wheel.

DIY









Precision Bi-color Handle



A compact and versatile tool

Polished heavy steel ratchet arm for a smooth nonbinding operation Heat treated bolts

Drop forged steel hooks with spring safe latches

Mini Type Single Gear & Single Pawl

				Thickness		PACKING			
ITEM	CAPACITY	CABLE	ноок	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HP-100	3/4 TON	4mm x 7ft	2	2.3mm	2.3mm	12	14	1.1	6
HP-111	1 TON	5mm x 10ft	2	2.6mm	2.6mm	15	17	1.45	6
HP-112	1½ TON	5mm x 12ft	2	3.2mm	3mm	18	20	1.45	6



DIY











A compact and versatile tool

Polished heavy steel ratchet arm for a smooth nonbinding operation Heat treated bolts

Drop forged steel hooks with spring safe latches

Mini Type Single Gear & Single Pawl

				Thic	kness		PACI	KING	
ITEM	CAPACITY	CABLE	ноок	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HP-110	1 TON	4mm x 7ft	2	2.3 mm	2.3 mm	12	14	1.1	6





A compact and versatile tool

Polished heavy steel ratchet arm for a smooth nonbinding operation Heat treated bolts

Drop forged steel hooks with spring safe latches

Mini Type Double Gear & Double Pawl

				Thickness		PACKING				
ITEM	CAPACITY	CABLE	ноок	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY	
HP-102	2 TON	5mm x 7ft	2	2.8mm	2.6mm	15	16	1.1	6	
HP-113	2 TON	5mm x 10ft	2	3.0mm	2.8mm	18	19	1.45	6	



DIY



A compact and versatile tool

Polished heavy steel ratchet arm for a smooth nonbinding operation Heat treated bolts

Drop forged steel hooks with spring safe latches

Mini Type Double Gear & Double Pawl

				Thickness		PACKING			
ITEM	CAPACITY	CABLE	HOOK	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HP-114	2 TON	5mm x 10ft	3	3.5mm	3.5mm	24	26	1.45	6



A great helpmate for your life and work

Comfortable hand grip

Heavy duty steel stamped ratchet gears, drive pawls and stop pawls for reinforcement Heat treated bolts

Drop forged hanging bracket can be operated by 360 degrees

AI Type Single Gear & Single Pawl

_			HOOK	Thic	kness		PACI	KING	
ITEM	CAPACITY	CABLE	ноок	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HP-117	2 TON	5mm x 12ft	2	3.5mm	3.5mm	21.5	23.5	1.45	6
HP-132	3 TON	5mm x 12ft	2	4mm	4.5mm	25	27	1.75	6





A great helpmate for your life and work

Comfortable hand grip

Heavy duty steel stamped ratchet gears, drive pawls and stop pawls for reinforcement Heat treated bolts

Drop forged hanging bracket can be operated by 360 degrees

AI Type Single Gear & Single Pawl

ITEM				Thickness		PACKING				
ITEM	CAPACITY	CABLE	HOOK	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY	
HP-133	3 TON	5mm x 12ft	3	4mm	4.5mm	27	29	1.75	6	



A great helpmate for your life and work

Comfortable hand grip

Heavy duty steel stamped ratchet gears, drive pawls and stop pawls for reinforcement Heat treated bolts

Double gears for equilibrium

Drop forged hanging bracket can be operated by 360 degrees

AI Type Double Gear & Double Pawl

	A				Thick	kness		PACI	KING	
4	ITEM	CAPACITY	CABLE	HOOK	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
1	HP-123	2 TON	5mm x 10ft	2	3.5mm	3.5mm	22	24	1.45	6
	HP-124	2 TON	5mm x 10ft	3	3.5mm	3.5mm	24	26	1.45	6













A great helpmate for your life and work

Comfortable hand grip

Heavy duty steel stamped ratchet gears, drive pawls and stop pawls for reinforcement Heat treated bolts

Drop forged hanging bracket can be operated by 360 degrees

AI Type Double Gear & Double Pawl

ı	ITEM	CADACITY			Thickness		PACKING				
	ITEM	CAPACITY	CABLE	HOOK	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY	
ſ	HP-131	3 TON	5mm x 10ft	2	3.5mm	4.0mm	26	27	1.75	6	



A great helpmate for your life and work

Comfortable hand grip


Heavy duty steel stamped ratchet gears, drive pawls and stop pawls for reinforcement Heat treated bolts

Drop forged hanging bracket can be operated by 360 degrees

AI Type Single Gear & Single Pawl

				Thickness		PACKING			
ITEM	CAPACITY	CABLE	ноок	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HP-134	4 TON	6mm x 10ft	2	4.0mm	4.0mm	21.5	22.5	1.8	4
HP-135	4 TON	6mm x 10ft	3	4.0mm	4.0mm	22.5	23.5	1.9	4



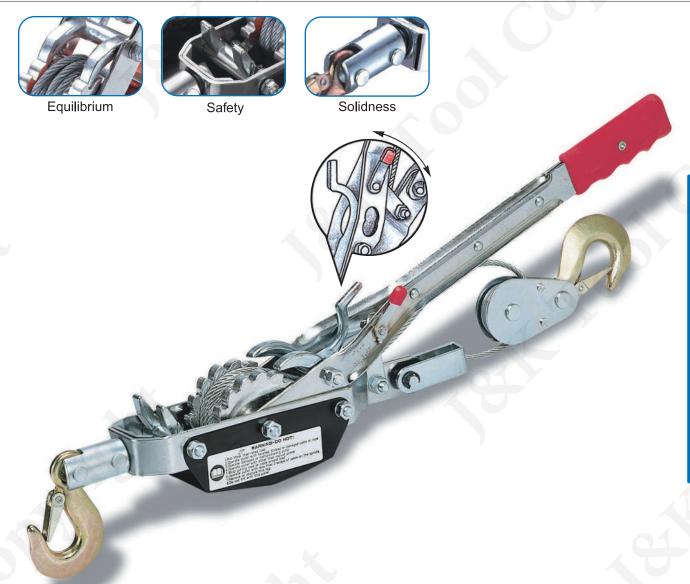

A great helpmate for your life and work

Comfortable hand grip

Aluminum alloy gears for wear resistance

Heat treated bolts

Double gears for equilibrium

Drop forged hanging bracket can be operated by 360 degrees

AI Type with Switch Double Gear & Double Pawl

ITEM				Thickness		PACKING			
ITEM	CAPACITY	CABLE	ноок	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HP-121	2 TON	5mm x 10ft	2	3.5mm	3.5mm	22.8	23.8	1.75	6



Strong, durable and easy operation

Durable solid steel gear construction for greater pulling power & safety Large drop forged alloy steel safety hooks Attractive bi-colored grip Cable clamp fixed onto the drum for safety

D Type Double Gear & Double Pawl

\triangle				Thickness		PACKING (Color Box)				
ITEM	CAPACITY	CABLE	ноок	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY	
HP-123D	2.5 TON	5mm x 10ft	2	3.5mm	3.5mm	24.6	25.3	1.75	6	
HP-148D	4 TON	6mm x 10ft	3	5mm	6mm	22.9	23.5	1.38	3	






Strong, durable and easy operation

Durable solid steel gear construction for greater pulling power & safety Large drop forged alloy steel safety hooks Attractive bi-colored grip Cable clamp fixed onto the drum for safety

D Type Single Gear & Single Pawl

				Thickness		PACKING (Color Box)				
ITEM	CAPACITY	CABLE	ноок	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY	
HP-117D	2 TON	5mm x 12ft	2	3.5mm	3.5mm	23.5	24.2	1.75	6	
HP-141D	4 TON	6mm x 12ft	3	5mm	6mm	21.5	22.2	1.38	3	
HP-142D	4 TON	6mm x 12ft	2	5mm	6mm	20	20.6	1.38	3	

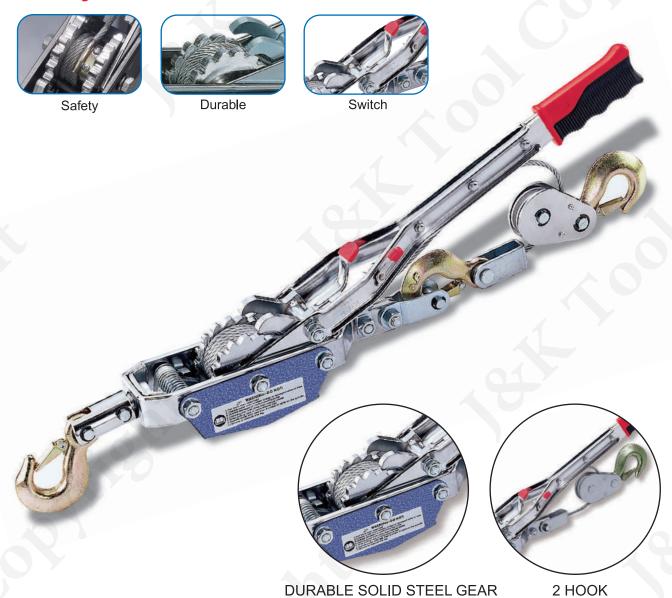

Strong, durable and easy operation

Durable solid steel gear construction for greater pulling power & safety Large drop forged alloy steel safety hooks Attractive bi-colored grip Cable clamp fixed onto the drum for safety

AI Type with Switch Double Gear & Double Pawl

, ,									
				Thickness		PACKING (Color Box)			
ITEM	CAPACITY	CABLE	HOOK	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HP-121D	2.5 TON	5mm x 10ft	2	3.5mm	3.5mm	24.6	25.3	1.75	6
HP-147D	4 TON	6mm x 10ft	3	5mm	6mm	22.9	23.5	1.38	3





Strong, durable and easy operation

The new lightweight yet powerful hand power puller provides high strength but weight just 4.3 kg.

AI Type with Switch Double Gear & Double Pawl

N N				Thickness		PACKING (Color Box)			ox)
ITEM	CAPACITY	CABLE	ноок	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HP-161D	4 TON	6mm x 8ft	2	3.5mm	3.5 mm	19.2	20.5	1.36	4

Webbing Puller Protect your cargo without scratching!



Your best partner & helpmate of labor-saving

It's a simple, but labor saving device designed based on the physical principles to help generate maximum pulling force by minimum force.

It's compact and light-weighted that make the puller easy to operate and carry. Applying to soft webbing instead of wires makes it possible to extend as much the length as needed.

Better fixation for the fragile surface cargo.

Non-conductive, Corrosion resistance and high strength strap.

Standard Type with Switch

- 10										
	7000		GEAR/		Thickness		PACKING			
ITEM	CAPACITY	WEBBING	PAWL	HOOK	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HPW-211	2 TON	25mm x 6m/9m	DOUBLE	2	3.5mm	3.5mm	19.5	21.5	1.95	6

Package: 1pc / color box



Leisure

Emergency



Boating



${\it Rope\ Puller}$ Powerful tool for hauling and protecting cargo!





Transportation



Leisure

An innovation to prevent Hand Power Puller from tangle

Great for boat yards, motorcycles, home, etc.

Easy operation

Unlimited reach

Durable and Strong


Equipped with non-conductive Polyester rope

Polyester rope prevents object's surface from damaging or scraping

Ergonomic and light weight construction

Easy to carry and store

				GEAR/ LIANDLE		Thick	ness	PACKING			
ITEM	CAPACITY	ROPE	PAWL	HANDLE TYPE	ноок	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HPR-301	1 TON	Ø 10mm x 6m/9m	DOUBLE	STANDARD	3	3mm	3mm	18	19	1.1	6





Emergency



Boating

$oldsymbol{Rope\ Puller}$ Powerful tool for hauling and protecting cargo !



An innovation to prevent Hand Power Puller from tangle

Great for boat yards, motorcycles, home, etc.

Easy operation

Unlimited reach

Durable and Strong

Equipped with non-conductive Polyester rope

Polyester rope prevents object's surface from damaging or scraping

Ergonomic and light weight construction

Easy to carry and store

Ergonomic detachable handle design : 1. Bi-color

2. With separable emergency light

						•		_			
			GEAR/ LIANDIE		Thick	Thickness		PACKING (Color Box)			
ITEM	CAPACITY	ROPE	PAWL	HANDLE TYPE	ноок	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HPR-302-1	1 TON	Ø 10mm x 6m/9m	DOUBLE	Black	3	Ø19x3mm	3mm	15	16	1.1	6
HPR-302-2	1 TON	Ø 10mm x 6m/9m	DOUBLE	Bi-Color	3	Ø19x3mm	3mm	15	16	1.1	6
HPR-302-3	1 TON	Ø 10mm x 6m/9m	DOUBLE	With Light	3	Ø19x3mm	3mm	15.5	17.5	1.1	6



Leisure



Gardening



Fence



Portable Puller Big puller in a little case!



Store easily under a pick-up seat or straps in a luggage carrier

Ergonomic detachable handle design Emergency situations: As a winch, move, immobilize, tow, rescue your vehicle in slopes, hollows, slippery terrain: snow covered, sandy or muddy road Patents pending in USA, Canada, China and Taiwan

	_	Cable	GEAR/	AR/ LIANDIE		Thickness		PACKING			
ITEM	CAPACITY		PAWL	HANDLE TYPE	HOOK	Handle	Body	N.W. (KG)	G.W. (KG)	CUFT	Q'TY
HP-101P-1	1 TON	5mm x 10 '	Single	Black	2	3.5mm	3mm	20	21	1.96	6
HP-101P-2	1 TON	5mm x 10 '	Single	Bi-Color	2	3.5mm	3mm	20	21	1.96	6
HP-101P-3	1 TON	5mm x 10 '	Single	With Light	2	3.5mm	3mm	20	21	1.96	6
HP-101PB-1	1 TON	4mm x 6'	Single	Black	2	3.5mm	3mm	20	21	1.96	6
HP-101PB-2	1 TON	4mm x 6'	Single	Bi-Color	2	3.5mm	3mm	20	21	1.96	6
HP-101PB-2	1 TON	4mm x 6'	Single	With Light	2	3.5mm	3mm	20	21	1.96	6

Package: 1 set / blow case



Easy assembly handle



Emergency



Fence

Tow Strap











2" TOW STRAP

ITEM NO.	(W) x (L)	BREAKING CAP. 4000 kgs	BREAKING CAP. 5000 kgs	BREAKING CAP. 6000 kgs
TS-5003	2" x 1m	W/HP/DJ	W/HP/DJ	W/HP
TS-5006	2" x 2m	W/HP/DJ	W/HP/DJ	W/HP
TS-5010	2" x 3m	W/HP/DJ	W/HP/DJ	W/HP
TS-5013	2" x 4m	W/HP/DJ	W/HP/DJ	W/HP
TS-5016	2" x 5m	W/HP/DJ	W/HP/DJ	W/HP
TS-5020	2" x 6m	W/HP/DJ	W/HP/DJ	W/HP
TS-5023	2" x 7m	W/HP/DJ	W/HP/DJ	W/HP
TS-5026	2" x 8m	W/HP/DJ	W/HP/DJ	W/HP
TS-5030	2" x 9m	W/HP/DJ	W/HP/DJ	W/HP
TS-5033	2" x 10m	W/HP/DJ	W/HP/DJ	W/HP

2" DOUBLE LAYERS TOW STRAP

ITEM NO.	DESCRIPTION	BREAKING CAP. 7000 (kgs)	PACK
TS-5003DW	2" x 1m	w	PVC Bag / Double Blister
TS-5006DW	2" x 2m	W	PVC Bag / Double Blister
TS-5010DW	2" x 3m	W	PVC Bag / Double Blister
TS-5013DW	2" x 4m	W	PVC Bag / Double Blister
TS-5016DW	2" x 5m	w	PVC Bag / Double Blister
TS-5020DW	2" x 6m	W	PVC Bag / Double Blister
TS-5023DW	2" x 7m	W	PVC Bag / Double Blister
TS-5026DW	2" x 8m	W	PVC Bag / Double Blister
TS-5030DW	2" x 9m	W	PVC Bag / Double Blister
TS-5033DW	2" x 10m	W	PVC Bag / Double Blister

3" TOW STRAP

ITEM NO.	DESCRIPTION	BREAKING CAP. 7000 (kgs)	PACK
TS-7506W	3" x 2m	W	PVC Bag / Double Blister
TS-7510W	3" x 3m	W	PVC Bag / Double Blister
TS-7513W	3" x 4m	W	PVC Bag / Double Blister
TS-7516W	3" x 5m	W	PVC Bag / Double Blister
TS-7520W	3" x 6m	W	PVC Bag / Double Blister
TS-7523W	3" x 7m	W	PVC Bag / Double Blister
TS-7526W	3" x 8m	W	PVC Bag / Double Blister
TS-7530W	3" x 9m	W	PVC Bag / Double Blister
TS-7533W	3" x 10m	W	PVC Bag / Double Blister

Remark: 1.the abbreviation above mean the separate end-fitting attached to the tow strap,the details will be as following (please choose one end-fitting only as your product):

W -2 Sewn loops

DJ -2 "DJ" hooks

HP -2 "HP" hooks

2.PVC bag package.



Wire Tow Cable



DESCRIPTION	PACKAGE	N.W.(KG)	G.W.(KG)	CUFT	Q'TY
5mm x 12ft W/O HOOK	Sliding card	6.0	8.0	1.45'	15
5mm x 12ft W/2 HOOK	Sliding card	12.0	14.0	1.45'	15
5mm x 20ft W/O HOOK	Sliding card	10.0	12.0	1.45'	15
5mm x 20ft W/2 HOOK	Sliding card	16.0	18.0	1.45'	15
6mm x 12ft W/O HOOK	Sliding card	8.5	10.5	1.45'	15
6mm x 12ft W/2 HOOK	Sliding card	17.5	19.5	1.45'	15
6mm x 20ft W/O HOOK	polybag	26.7	28.2	1.20'	30
6mm x 20ft W/2HOOK	polybag	29.8	31.5	1.20'	20
8mm x 12ft W/O HOOK	Sliding card	13.5	15.5	1.45'	15
8mm x 12ft W/2HOOK	Sliding card	26.0	28.0	1.45'	15
8mm x 20ft W/O HOOK	polybag	27.8	29.3	1.40'	20
8mm x 20ft W/2 HOOK	polybag	22.0	23.5	1.40'	10
!	5mm x 12ft W/O HOOK 5mm x 12ft W/O HOOK 5mm x 20ft W/O HOOK 5mm x 20ft W/O HOOK 6mm x 12ft W/O HOOK 6mm x 12ft W/O HOOK 6mm x 20ft W/O HOOK 6mm x 20ft W/O HOOK 6mm x 12ft W/O HOOK	5mm x 12ft W/O HOOK Sliding card 5mm x 12ft W/2 HOOK Sliding card 5mm x 20ft W/O HOOK Sliding card 5mm x 20ft W/2 HOOK Sliding card 5mm x 12ft W/O HOOK Sliding card 6mm x 12ft W/O HOOK Sliding card 6mm x 20ft W/O HOOK Polybag 6mm x 20ft W/2HOOK Polybag 8mm x 12ft W/O HOOK Sliding card 8mm x 12ft W/O HOOK Sliding card 8mm x 12ft W/O HOOK Sliding card 8mm x 20ft W/O HOOK Polybag	5mm x 12ft W/O HOOK Sliding card 6.0 5mm x 12ft W/2 HOOK Sliding card 12.0 5mm x 20ft W/O HOOK Sliding card 10.0 5mm x 20ft W/2 HOOK Sliding card 16.0 5mm x 12ft W/O HOOK Sliding card 8.5 5mm x 12ft W/2 HOOK Sliding card 17.5 6mm x 20ft W/O HOOK polybag 29.8 3mm x 12ft W/O HOOK Sliding card 13.5 8mm x 12ft W/2HOOK Sliding card 26.0 3mm x 20ft W/O HOOK polybag 27.8	5mm x 12ft W/O HOOK Sliding card 6.0 8.0 5mm x 12ft W/2 HOOK Sliding card 12.0 14.0 5mm x 20ft W/O HOOK Sliding card 10.0 12.0 5mm x 20ft W/2 HOOK Sliding card 16.0 18.0 5mm x 12ft W/O HOOK Sliding card 8.5 10.5 5mm x 12ft W/2 HOOK Sliding card 17.5 19.5 5mm x 20ft W/O HOOK polybag 26.7 28.2 6mm x 20ft W/2HOOK polybag 29.8 31.5 8mm x 12ft W/O HOOK Sliding card 13.5 15.5 8mm x 20ft W/2HOOK Sliding card 26.0 28.0 9mm x 20ft W/O HOOK polybag 27.8 29.3	5mm x 12ft W/O HOOK Sliding card 6.0 8.0 1.45' 5mm x 12ft W/2 HOOK Sliding card 12.0 14.0 1.45' 5mm x 20ft W/O HOOK Sliding card 10.0 12.0 1.45' 5mm x 20ft W/2 HOOK Sliding card 16.0 18.0 1.45' 5mm x 12ft W/O HOOK Sliding card 8.5 10.5 1.45' 5mm x 20ft W/2 HOOK Sliding card 17.5 19.5 1.45' 5mm x 20ft W/2HOOK polybag 26.7 28.2 1.20' 3mm x 12ft W/O HOOK Sliding card 13.5 15.5 1.45' 8mm x 12ft W/2HOOK Sliding card 26.0 28.0 1.45' 8mm x 20ft W/O HOOK Sliding card 26.0 28.0 1.45'





















