



WINCH

CONSTANTLY REFINING PRODUCTS




About JK



Hardness Tester




Puller Fatigue Tester



Salt Spray (Fog) Testing Machine



4T Testing Machine




Tie Down Fatigue Tester



20T Micro-computer
Universal Testing Machine



Function Testing Machine



Torsion Testing Machine



Winch Testing Machine

Since 1985, when Jun Kaung first Hand Power Puller was manufactured in Taiwan, quality has been an integral part of all the products that bear Jun Kaung name.

Jun Kaung operates one operations center in Taiwan. The headquarters located in Taichung markets and finances global business and manages brand worldwide.

Market-Oriented Strategic Planning

Jun Kaung develops the board marketing objectives and strategy based on an analysis of the current marketing situation and opportunities. Jun Kaung Group is a market-oriented corporation, which enables it to remain at the forefront of the markets in auto industry.

Jun Kaung means a high-performance mark that consistently satisfies or exceeds the expectation of consumers.

Jun Kaung pioneers both the research and the development fields of manufacturing hand tools that have become the essential elements in auto industries.

Not only does Jun Kaung satisfy its customers' requirements, but also it consults for the interests of its customers.

Jun Kaung is an established and rapidly growing supplier of hand tool products to auto industry. Its offerings include hand power puller, tie down, trailer winch, trailer jack, tie down buckle, web sling, luggage cord, cargo net, hook, and related auto accessories.

One-Stop Shop and Total Solution

"Listening to the customers" is an essential feature of our quality service initiative.

To pursue enhanced quality efforts including improved production procedures, innovative research and development, and best service.

Our customer service team responds the questions and complaints within 24 hours.


We continually look for ways to improve quality. Our quality system as well as our products is established and developed with international standards.

We commit to research a dedicated product development and application program, designed to provide value-added services to our customers.

A partnership with customers enhances their ability to edge competition by getting to market faster and more economically.

Collection

• Hand Power Puller



• Winch



• Trailer Jack



• Tie Down & Accessory





WINCHES

JUN KAUNG TRAILER WINCHES are designed for easier loading of your small boat, Go Kart, ATV, lawn mower, cargo, etc. They include a comfortable handle grip for a positive hold while cranking. An anti-corrosive finish for superior corrosion resistance even in saltwater environments, strong winch drums and pressed steel gears to resist wear and last longer.

Standard



W06-506



W06-508B



W06-514

Professional



W06-D520



W06-512G



W06-D520G



W06-525A



W06-520



W06-D532

Stainless steel



W06-508-9



W06-512-9



W06-D520-9

Worm gear winches



W06-920A



W06-920BL

Standard



CABLE



STRAP




Switch Pawl (one way)



Gear Cover (optional)

W06-506 / W06-508

- Solid gears construction
- Black electrostatic discharge coating or zinc plated finish
- Precise gear tooth engagement

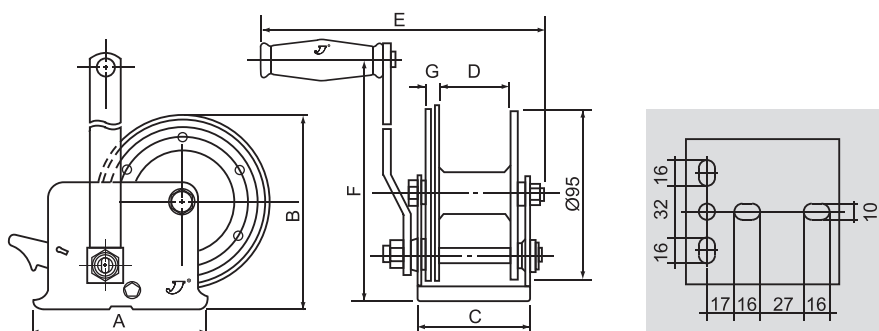

ITEM NO.	CAPACITY	GEAR RATIO	A	B	C	D	E	F	G	THICKNESS	
										BODY	GEAR
W06-506	600lbs / 270kgs	3.1 : 1	95	104	89	50	230	205	10	3.0	6.0
W06-508	850lbs / 385kgs	3.1 : 1	95	104	89	50	230	205	11	3.2	7.0

※ Plastic guard for the gear is available

Standard



CABLE



STRAP




Switch Pawl (two way)



Gear Cover (optional)

W06-508B / W06-510B

- Solid gear construction
- Black electrostatic discharge coating or zinc plated finish
- Precise gear tooth engagement
- Two position pawl
- Switch with PVC cover

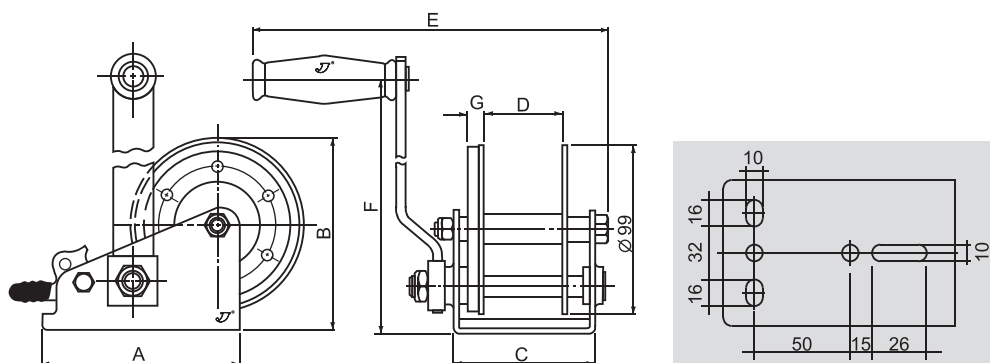

ITEM NO.	CAPACITY	GEAR RATIO	A	B	C	D	E	F	G	THICKNESS	
										BODY	GEAR
W06-508B	850lbs / 385kgs	3.1 : 1	126	117	88	49	233	186	11	3.0	7.0
W06-510B	1000lbs / 450kgs	4.1 : 1	138	153	89	52	240	223	10	3.2	7.0

※ Gear Cover is available

Standard



CABLE



STRAP




Switch Pawl (two way)



Gear Cover (optional)

W06-512 / W06-514 / W06-516

- Solid gear construction
- Black electrostatic discharge coating or zinc plated finish
- Precise gear tooth engagement

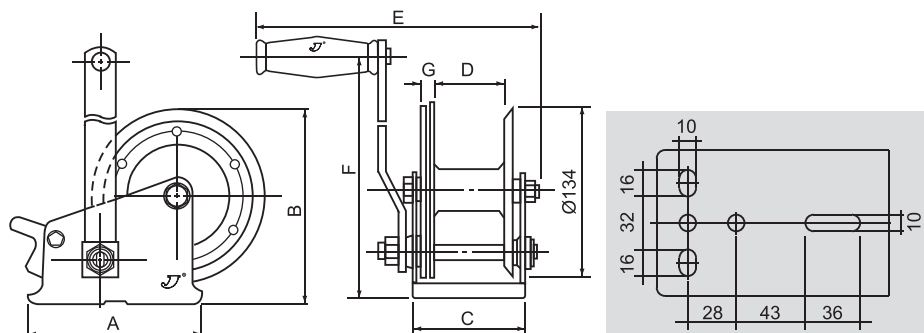

ITEM NO.	CAPACITY	GEAR RATIO	A	B	C	D	E	F	G	THICKNESS	
										BODY	GEAR
W06-512	1200lbs / 545kgs	4.1 : 1	138	153	89	52	240	223	10	3.0	6.0
W06-514	1400lbs / 636kgs	4.1 : 1	138	153	89	52	240	223	12	3.0	8.0
W06-516	1600lbs / 727kgs	4.1 : 1	138	153	89	52	240	223	12	3.5	8.0

※ Gear Cover is available

Standard

WINCH WITH BRAKE DEVICE



CABLE




STRAP



Automatic Brake

W06-512G / W06-514G / W06-516G

- Solid gear construction
- Black electrostatic discharge coating or zinc plated finish
- With brake for easy operation
- Dual drive enhances pulling ability by distributing the load equally
- Gear cover (optional)

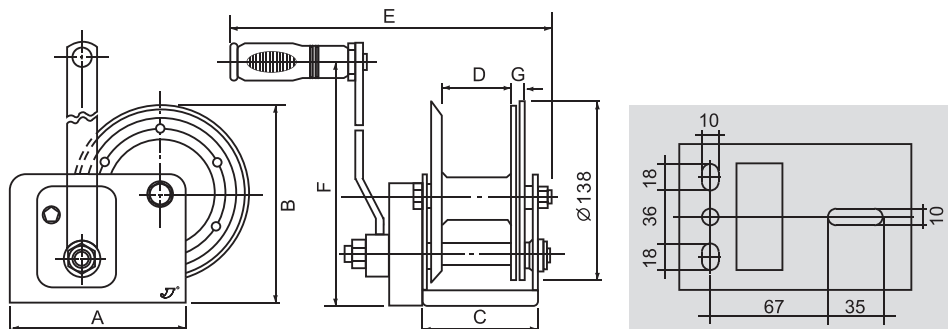

ITEM NO.	CAPACITY	GEAR RATIO	A	B	C	D	E	F	G	THICKNESS	
										BODY	GEAR
W06-512G	1200lbs / 545kgs	4.1 : 1	133	158	90	53	260	240	10	3.2	7.0
W06-514G	1400lbs / 636kgs	4.1 : 1	133	158	90	53	260	240	12	3.2	7.5
W06-516G	1600lbs / 727kgs	4.1 : 1	133	158	90	53	260	240	12	3.5	8.0



Switch Pawl (two way)





CABLE



STRAP

W06-D520

- Solid gear construction
- Black electrostatic discharge coating or zine plated finish
- Precise gear tooth engagement
- Dual drive enhances pulling ability by distributing the load equally
- Switch with PVC cover
- Gear cover (optional)

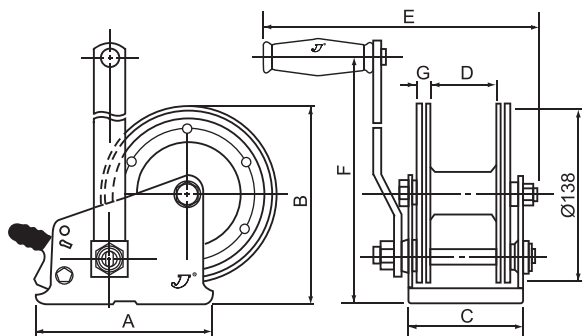

ITEM NO.	CAPACITY	GEAR RATIO	A	B	C	D	E	F	G	THICKNESS	
										BODY	GEAR
W06-D520	2000lbs / 900kgs	4.3 : 1	138	153	89	51	242	223	11	3.2	7.0

Professional Handle for EASY DETACHMENT



CABLE



STRAP



Switch Pawl (two way)




Gear Cover (optional)



Snap-on handle

W06-520 / W06-525


- Solid gear construction
- Black electrostatic discharge coating or zinc plated finish
- Precise gear tooth engagement
- Embossed frame for reinforcement
- Built-in hand brake (for item W06-525)
- Snap-on handle for easy detachment

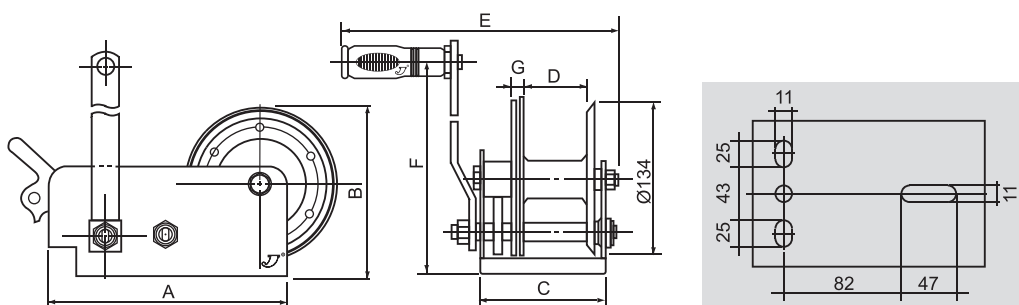

ITEM NO.	CAPACITY	GEAR RATIO	A	B	C	D	E	F	G	THICKNESS	
										BODY	GEAR
W06-520	2000lbs / 900kgs	4.1 : 1 / 10.7 : 1	180	154	130	68	298	299	12	4.0	8.0
W06-525	2500lbs / 1100kgs	5.1 : 1 / 13.3 : 1	198	185	131	67	298	299	14	4.5	9.0


※ Plastic guard for the gear is available

Professional

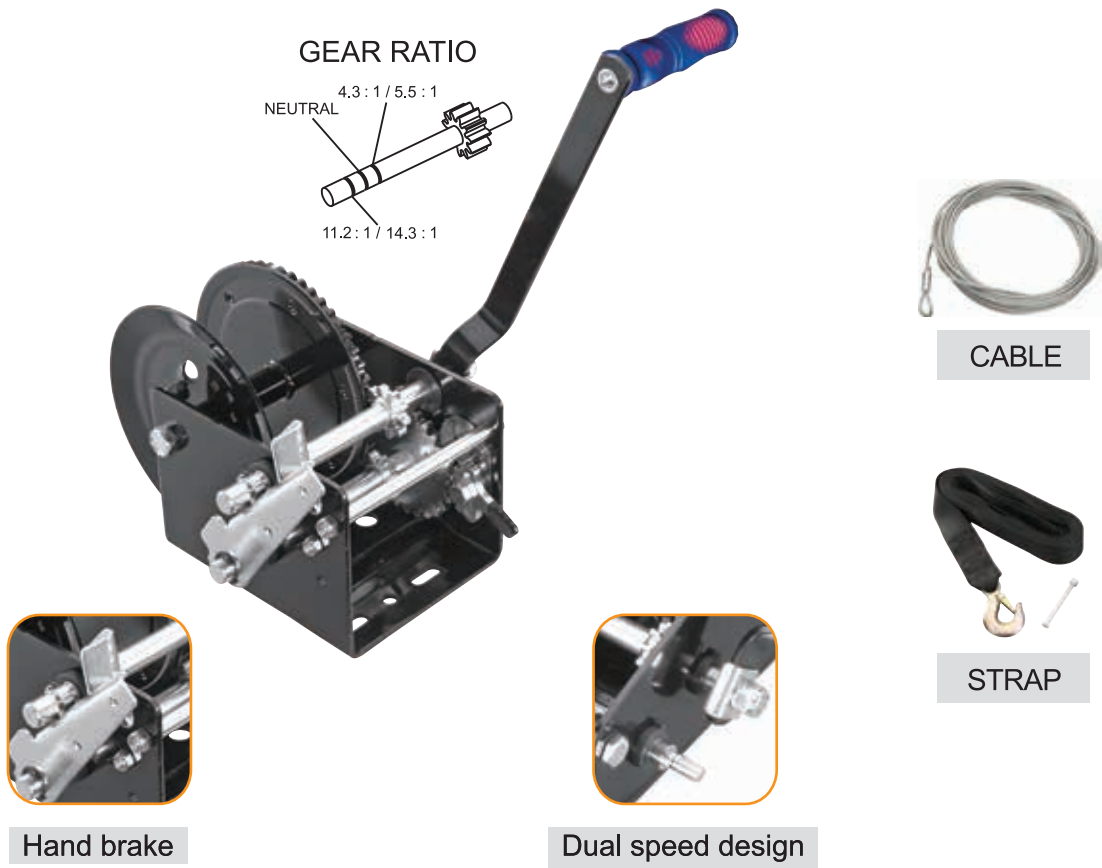

W06-520A / W06-525A

- Solid gear construction
- Black electrostatic discharge coating or zinc plated finish
- Precise gear tooth engagement
- Embossed frame for reinforcement
- Dual speed design
- Built-in hand brake (for item W06-525A)
- Shift lock available

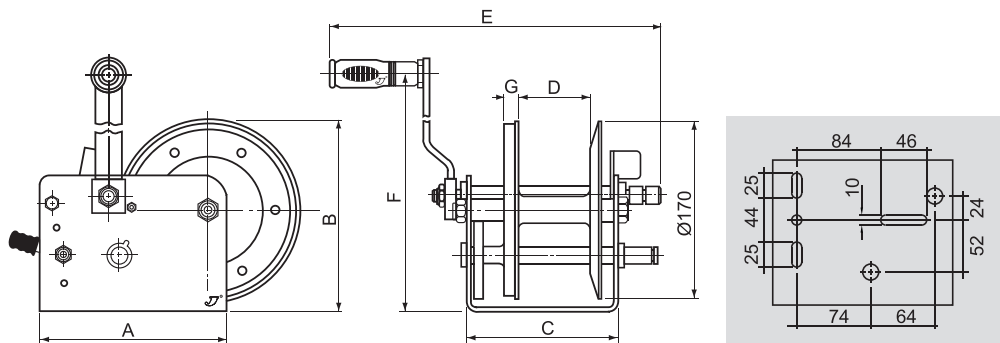

ITEM NO.	CAPACITY	GEAR RATIO	A	B	C	D	E	F	G	THICKNESS	
										BODY	GEAR
W06-520A	2000lbs / 900kgs	4.3 : 1 / 11.2 : 1	165	164	144	68	334	362	12	4.0	8.0
W06-525A	2500lbs / 1100kgs	5.5 : 1 / 14.3 : 1	180	183	145	67	334	362	14	4.5	9.0

Professional WINCHES WITH BRAKE



CABLE




STRAP

WINCHES


W06-D520G / W06-D525G

- Solid gear construction
- Black electrostatic discharge coating or zinc plated finish
- With brake for easy operation

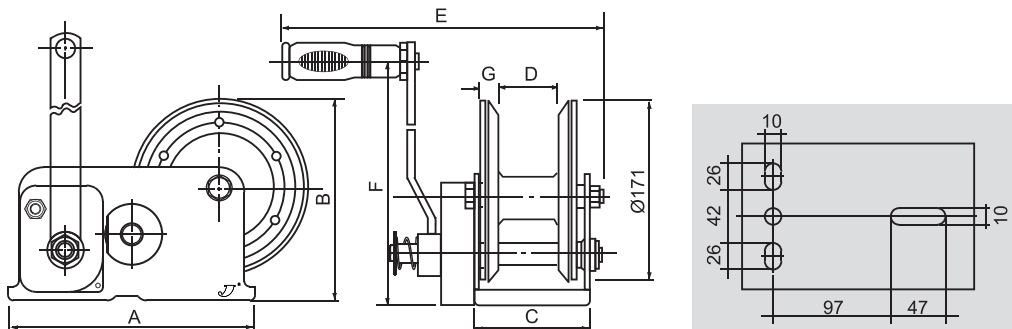

ITEM NO.	CAPACITY	GEAR RATIO	A	B	C	D	E	F	G	THICKNESS	
										BODY	GEAR
W06-D520G	2000lbs / 900kgs	13.3 : 1	230	187	131	66	306	313	12	4.0	8.0
W06-D525G	2500lbs / 1100kgs	13.3 : 1	230	187	131	66	306	313	14	4.5	9.0

Professional

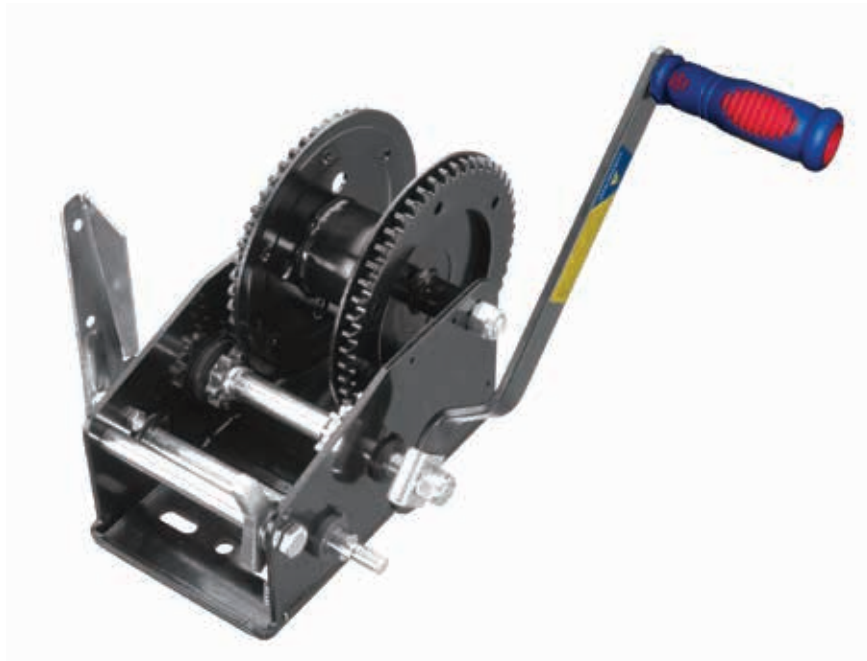

CABLE



STRAP



Switch Pawl (two way)




Dual speed design



Hand brake


W06-D532 / W06-D537

- Solid gear construction
- Black electrostatic discharge coating or zinc plated finish
- Precise gear tooth engagement
- Dual drive enhances pulling ability by distributing the load equally

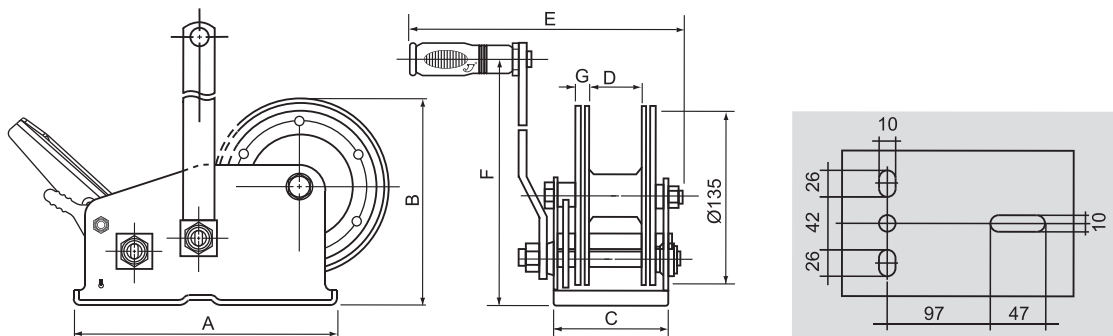

ITEM NO.	CAPACITY	GEAR RATIO	A	B	C	D	E	F	G	THICKNESS	
										BODY	GEAR
W06-D532	3200lbs / 1454kgs	5.1 : 1 / 13.1 : 1	230	184	131	66	292	300	14	4.5	8.0
W06-D537	3700lbs / 1684kgs	5.1 : 1 / 13.1 : 1	230	184	131	66	292	300	14	5.0	9.0

Professional WORM GEAR WINCHES

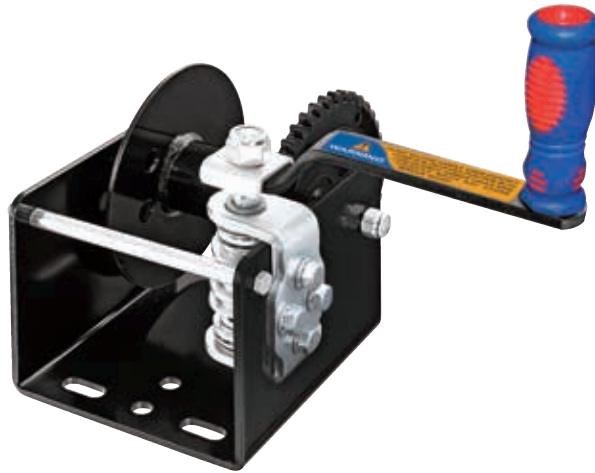


CABLE

W06-915A / W06-920A / W06-930A

Worm gear winches are used for the applications such as raising and lowering poultry and livestock equipment, typically ceiling mounted.

- Solid gear construction
- Arc-welded for high strength construction
- Reinforced bases
- Black electrostatic discharge coating
- Available in regular drum or divided reel

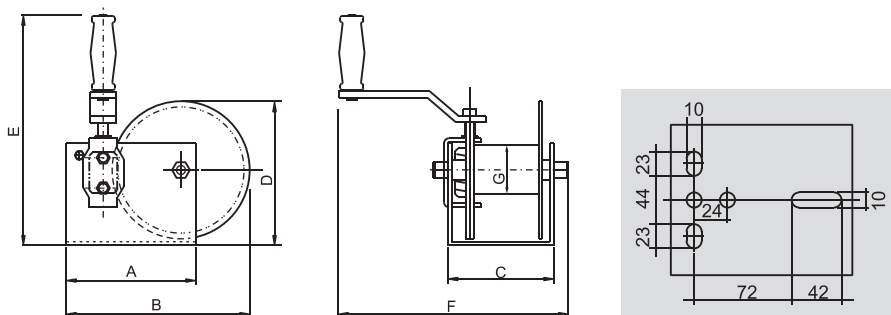

ITEM NO.	CAPACITY	GEAR RATIO	DESCRIPTION	A	B	C	D	E	F	DRUM Ø G	THICKNESS	
											BODY	GEAR
W06-915A	1500lbs / 700kgs	31 : 1	Regular Drum, Handle Drive	125	160	130	115	230	275	42	3.5	8.0
W06-920A	2000lbs / 900kgs	41 : 1	Regular Drum, Handle Drive	140	190	130	145	250	275	42	4.0	8.0
W06-930A	3000lbs / 1350kgs	51 : 1	Regular Drum, Handle Drive	160	228	130	178	270	275	60.5	4.5	9.0

Professional WORM GEAR WINCHES




CABLE

W06-915B / W06-920B / W06-930B

Worm gear winches are used for the applications such as raising and lowering poultry and livestock equipment, typically ceiling mounted.

- Solid gear construction
- Arc-welded for high strength construction
- Reinforced bases
- Black electrostatic discharge coating
- Available in regular drum or divided reel

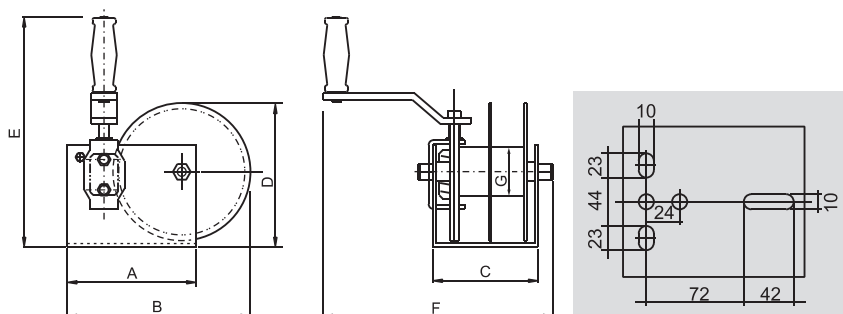

ITEM NO.	CAPACITY	GEAR RATIO	DESCRIPTION	A	B	C	D	E	F	DRUM Ø G	THICKNESS	
											BODY	GEAR
W06-915B	1500lbs / 700kgs	31 : 1	Divided Reel, Handle Drive	125	160	130	115	230	275	42	3.5	8.0
W06-920B	2000lbs / 900kgs	41 : 1	Divided Reel, Handle Drive	140	190	130	145	250	275	42	4.0	8.0
W06-930B	3000lbs / 1350kgs	51 : 1	Divided Reel, Handle Drive	160	228	130	178	270	275	48	4.5	9.0

Professional WORM GEAR WINCHES




CABLE

W06-915AL / W06-920AL / W06-930AL

Worm gear winches are used for the applications such as raising and lowering poultry and livestock equipment, typically ceiling mounted.

- Solid gear construction
- Arc-welded for high strength construction
- Reinforced bases
- Black electrostatic discharge coating
- Available in regular drum or divided reel

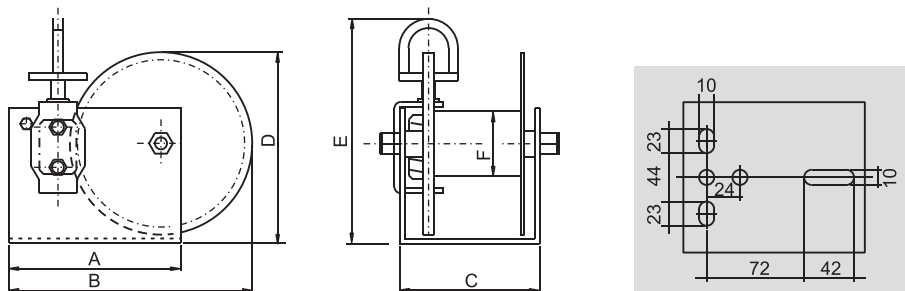

ITEM NO.	CAPACITY	GEAR RATIO	DESCRIPTION	A	B	C	D	E	DRUM Ø F	THICKNESS	
										BODY	GEAR
W06-915AL	1500lbs / 700 kgs	31 : 1	Regular Drum, Loop Drive	125	160	130	115	180	42	3.5	8.0
W06-920AL	2000lbs / 900 kgs	41 : 1	Regular Drum, Loop Drive	140	190	130	145	198	42	4.0	8.0
W06-930AL	3000lbs / 1350 kgs	51 : 1	Regular Drum, Loop Drive	160	228	130	178	210	60.5	4.5	9.0

Professional WORM GEAR WINCHES






CABLE

W06-915BL / W06-920BL / W06-930BL


Worm gear winches are used for the applications such as raising and lowering poultry and livestock equipment, typically ceiling mounted.

- Solid gear construction
- Arc-welded for high strength construction
- Reinforced bases
- Black electrostatic discharge coating
- Available in regular drum or divided reel



ITEM NO.	CAPACITY	GEAR RATIO	DESCRIPTION	A	B	C	D	E	DRUM Ø F	THICKNESS	
										BODY	GEAR
W06-915BL	1500lbs / 700kgs	31 : 1	Divided Reel, Loop Drive	125	160	130	115	180	42	3.5	8.0
W06-920BL	2000lbs / 900kgs	41 : 1	Divided Reel, Loop Drive	140	190	130	145	198	42	4.0	8.0
W06-930BL	3000lbs / 1350kgs	51 : 1	Divided Reel, Loop Drive	160	228	130	178	210	48	4.5	9.0

Professional Marine use (Stainless Steel)

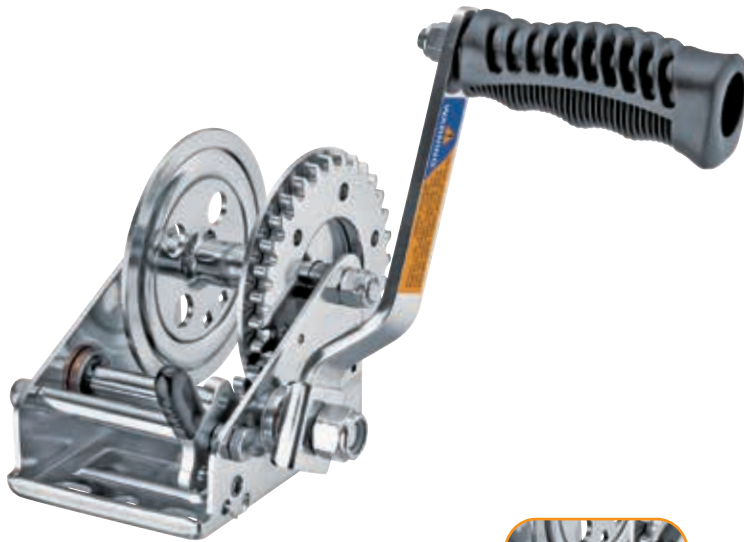

CABLE




STRAP



Switch Pawl (two way)

W06-508-9

- Stainless Steel
- Solid gear construction
- Precise gear tooth engagement
- Switch pawl with PVC cover

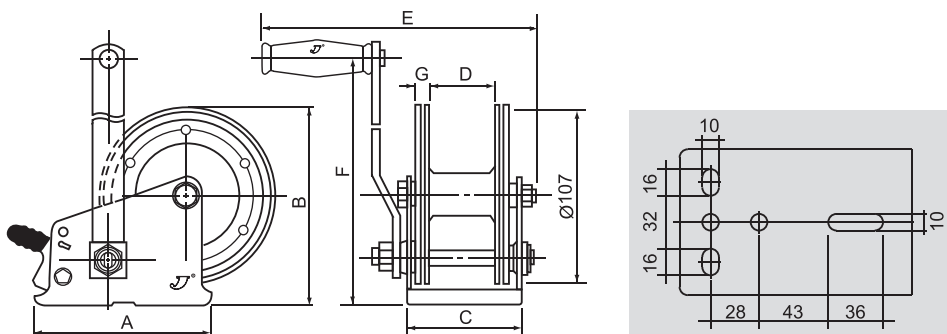

ITEM NO.	CAPACITY	GEAR	GEAR RATIO	A	B	C	D	E	F	G
W06-508-9	850lbs / 385kgs	Single	3.1 : 1	123	120	89	48	250	180	11

Professional Marine use (Stainless Steel)



CABLE




STRAP



Switch Pawl (two way)

W06-512-9

- Stainless Steel
- Solid gear construction
- Precise gear tooth engagement
- Switch pawl with PVC cover

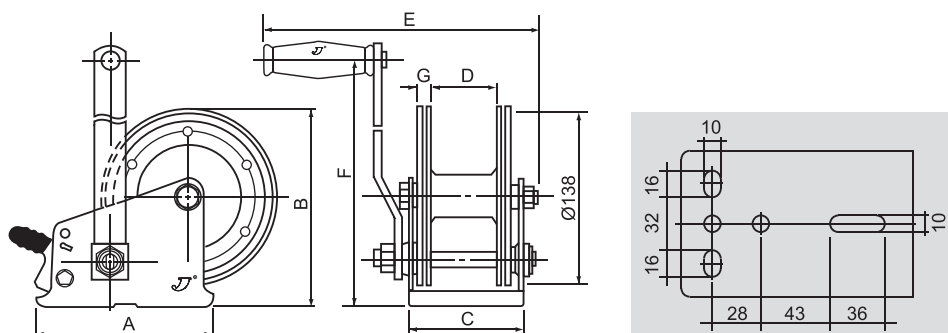

ITEM NO.	CAPACITY	GEAR	GEAR RATIO	A	B	C	D	E	F	G
W06-512-9	1200lbs / 545kgs	Single	4.1 : 1	137	153	89	51	244	228	9

Professional Marine use (Stainless Steel)



Switch Pawl (two way)



CABLE




STRAP

WINCHES

W06-D520-9

- Stainless Steel
- Solid gear construction
- Precise gear tooth engagement
- Dual drive enhances pulling ability by distributing the load equally
- Switch pawl with PVC cover

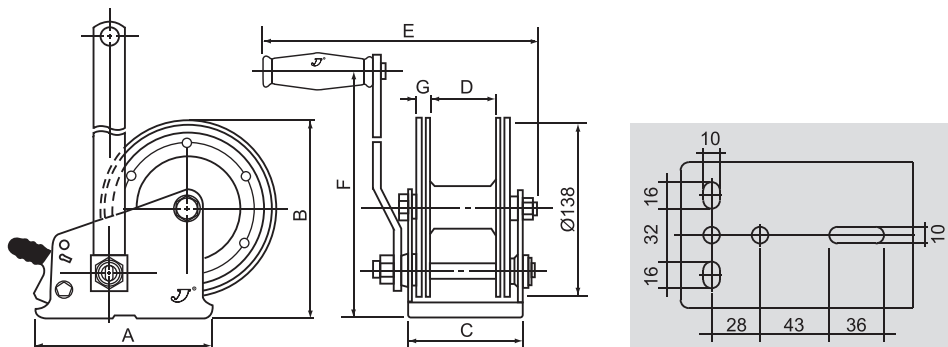

ITEM NO.	CAPACITY	GEAR	GEAR RATIO	A	B	C	D	E	F	G
W06-D520-9	2000lbs / 900kgs	Double	4.1 : 1	138	154	90	51	244	228	9

Professional ACCESSORIES



Winch cable & Hook
(cable keeper included)

ITEM NO.	DIAMETER X LENGTH
WC-5CAH-15	5mm X 15FT (5mm X 4.5M) Cable With Hook
WC-5CAH-20	5mm X 20FT (5mm X 6M) Cable With Hook
WC-5CAH-25	5mm X 25FT (5mm X 7.6M) Cable With Hook
WC-5CAH-30	5mm X 30FT (5mm X 9M) Cable With Hook
WC-6CAH-15	6mm X 15FT (6mm X 4.5M) Cable With Hook
WC-6CAH-20	6mm X 20FT (6mm X 6M) Cable With Hook
WC-6CAH-25	6mm X 25FT (6mm X 7.6M) Cable With Hook
WC-6CAH-30	6mm X 30FT (6mm X 9M) Cable With Hook
WC-8CAH-15	8mm X 15FT (8mm X 4.5M) Cable With Hook
WC-8CAH-20	8mm X 20FT (8mm X 6M) Cable With Hook
WC-8CAH-25	8mm X 25FT (8mm X 7.6M) Cable With Hook
WC-8CAH-30	8mm X 30FT (8mm X 9M) Cable With Hook



Winch strap & Hook

ITEM NO.	WIDTH X LENGTH
WB-5015HP	50mm X 15FT (50mm X 4.5M) Webbing With Hook
WB-5020HP	50mm X 20FT (50mm X 6M) Webbing With Hook
WB-5025HP	50mm X 25FT (50mm X 7.6M) Webbing With Hook
WB-5030HP	50mm X 30FT (50mm X 9M) Webbing With Hook
WB-6315HP	63mm X 15FT (63mm X 4.5M) Webbing With Hook
WB-6320HP	63mm X 20FT (63mm X 6M) Webbing With Hook
WB-6325HP	63mm X 25FT (63mm X 7.6M) Webbing With Hook



WP-50



WP-50B



WP-51




WP-52

GEAR COVER (Plastic)

- all winches supplied by Jun Kaung are available to attach the specific gear cover.

ITEM NO.	FOR WINCH ITEN
WP-50	W06-506, W06-508
WP-50B	W06-508B, W06-510B
WP-51	W06-512, W06-514, W06-516
WP-52	W06-520, W06-525

Let Jun Kaung's Quality Products Be Your Best Helpmate!

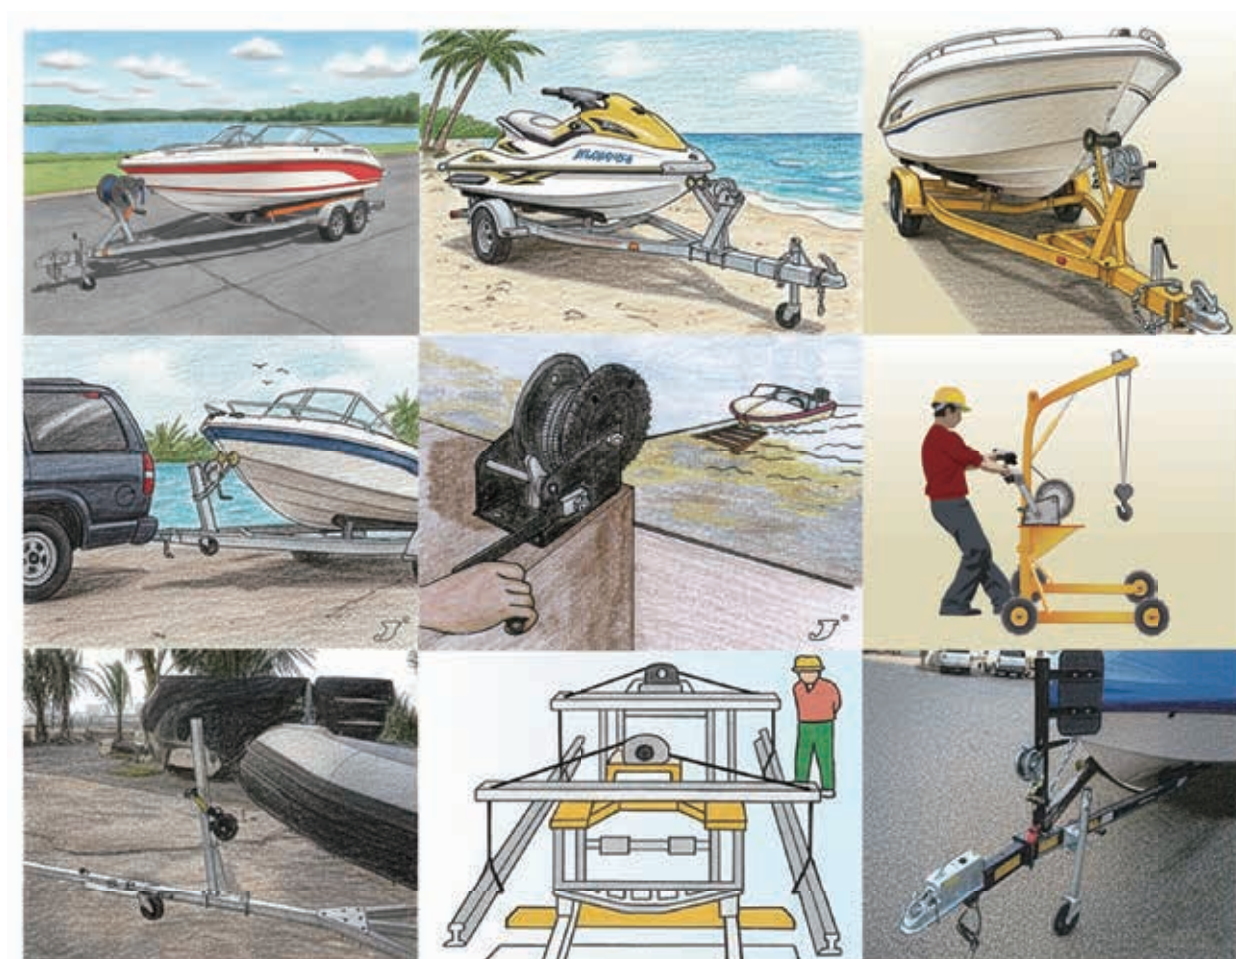



至光工具股份有限公司
Jun Kaung Industries Co., Ltd.

台灣台中市大里區景庄街180巷20號
Factory: NO. 20, LN. 180, JING ZHUANG ST., DALI DIST.,
TAICHUNG CITY 412027, TAIWAN
Tel:886-4-24962255 Fax:886-4-24969265
e-mail: jk@jktool.com.tw
www.jktool.com.tw

